


Battery Shaker KM 2 Akku

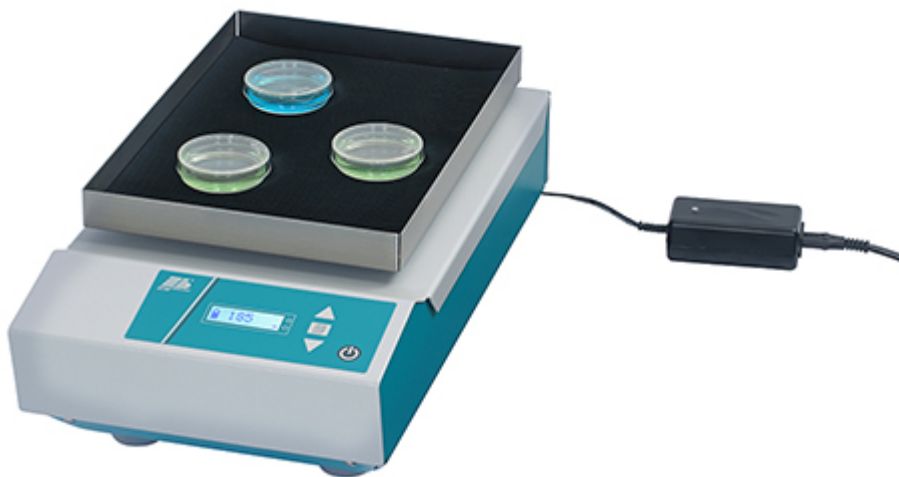

Description

The Battery Shaker KM 2 Akku with orbital motion can be used for various tasks thanks to its off-grid battery with a run time of min. 40 hours. The shaking platform of 200 x 295 mm can be loaded with max. 2 kg. The stroke of the laboratory shaker KM 2 Akku is 20 mm and the shaking speed is between 5 and 220 rpm.

Basic Equipment

Basic device incl. basic platform and rubber mat, with battery charger / power unit

Loading Capacity

Erlenmeyer flasks 100 ml 9 pieces

Erlenmeyer flasks 500 ml 4 pieces

You will find further loading possibilities [here](#)

Details

Motion:	orbital
Shaking platform:	200 x 295 mm
Max. load:	2 kg
Shaking speed:	5 - 220 rpm, in steps of 5
Stroke:	20 mm

Battery charging time: approx. 10 h
Runtime Battery: min. 40 h
Runtime with mains cable: 0 - 99 h 59 min / continuous
Order No.: 6135 000
Accessory: Universal tray KM Mini
Universal tray KM
Clamping strip KM

Technical specifications

Electrical supply battery charger: 100 - 240 V, 50 / 60 Hz
Internal electrical supply: 1 battery 12 V / 7 Ah
Enclosure protection: IP 21
Heat emission: approx. 4 W
Ambient temperature: 4°C to 45°C
Relative humidity: ~ 95 % (non-condensing)
Dimensions (w x d x h): 250 x 415 x 145 mm
Weight: 10,5 kg